


YHPConnect

AUTOMATIC 2 SIDES IDC FOR PITCH 1.50 ~ 2.54 M/C

YHPC-SK-A21

IDC PITCH : 1.50 ~ 2.54 , MAX. 12 WAYS

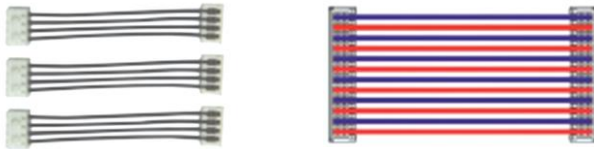

Features

- 1) Using Schneider Electric brand for the Servo Motor and SMC brand for the Pneumatic Component thereby able to provide better Accuracy, Efficiency and Stability.
- 2) Touch screen touch adjustment, including: Wire Cut Length and Strip Length.
- 3) The use of computer-based automatic detection, that detect for low air pressure, motor abnormalities and abnormal belt. Upon detect of error, it will automatically shut down, and will show the cause of the fault.
- 4) The best feature of the technology is simple adjustment thereby reduce Set-Up time.

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P:+65-91293768 | E-MAIL: pclee@singnet.com.sg / yhpc99@gmail.com

WEBSITE:www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |

YHPCConnect

AUTOMATIC 2 SIDES IDC FOR PITCH 1.50 ~ 2.54 M/C
YHPC-SK-A21

TECHNICAL DATA

Model	YHPC-SK-A21
Function	Cut, IDC termination on 1 side and strip on the end and 2 sides IDC termination (can do different facing for 2 sides)
Capacity	970 pcs / hr (12 ways wire x 2 sides x 2 IDC connector, 300 mm and below) 3,880 pcs / hr (2 ways wire x 2 sides x 4 IDC connector, 300 mm and below)
Connector Pitch	1.5 , 2.0 & 2.54 mm x 12 Ways maximum
Cut Length	50 mm ~ 1000 mm
Cut Length Accuracy	1 mm + (Cut Length x 0.2% and below)
Air Pressure	5 ~ 6 kgf / cm², Use Dry Air
Power Source	200/220V(within±10%) 50/60 Hz Single Phase If require 110V please request.
Detector	Low Air Pressure, Servo Motor and Belt Abnormal
Dimension/Mass	1050L x 650W x 1200H(mm) / Kgs
Packing Dimension	x x (mm) / Kgs
Packing Include	
Country Of Origin	China