




AUTO TWO ENDS CRIMP MACHINE YHPC-CAW-SD-04-01



AWG 16 ~ 28



≤ 11.0mm

Features

- 1) Offering precision and accuracy , driven by 6 Japanese made Servo motor.
- 2) Adopting Ball Screw technology to make wire stripping and crimping more accurate and reliable.
- 3) Productivity achievement of 3000 ~ 3300 pcs / hr.
- 4) All Setting done thru touch screen saving time for set up.
- 5) Quick set-up applicator.

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P:+65-96196415 | E-MAIL:pclee@singnet.com.sg

WEBSITE:www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |



AUTO TWO ENDS CRIMP MACHINE YHPC-CAW-SD-04-01



Technical Data

Model	YHPC-CAW-SD-04-01
Function	Cut , Strip & Crimp Single or Both Ends.
Wire Size	Awg 16 ~ 28 , Insulation O.D. maximum
Applicable Wire	AV, AVS, AVSS, CAVUS, KVKIV, UL
Stripping Length	Front Terminal Strip- 0.1 ~ 13.0 mm, Rear Terminal Strip – 0.1 ~ 15.0 mm
Minimum Cut Length	≥ 21.0 mm for Standard and Stability Performance. Special request minimum length must be at least 11.0mm (need to change wire gripper)
Maximum Cut Length	10.0 metre
Cut Length Accuracy	Cutting Length below 100mm: 0.5mm+(Setting Cut Length x 0.002) Cutting Length above 100mm: 1.0mm+(Setting Cut Length x 0.002)
Press Capacity	3.0 ton Using Inverter Motor x 2 units
Applicator	Side-Feed and End-Feed type, 01S or 01E. If need to use for your existing JST applicator you need to inform us before you purchase the machine.
Stroke Length	30 mm
Detector	Pressure down, Crimp error, Wire load
Air Pressure	5 ~ 6 kgf/cm ² , Use Dry Air
Power Source	220V(within±10%) 50/60 Hz Single Phase, 15A, *True Earth require.
Optional	Crimp Force Monitor- 2 Channels , SOLTEC brand
Dimension/Mass	110L x 92W x 160H (cm) / 400 Kgs
Packing Dimension	140 x 115 x (cm) / 450 Kgs
Packing Include	Wire Straightener cum Sender, SD-F, 01S or 01E Applicator x 2, Paper Winder x 2
Country Of Origin	Taiwan



PACKING INCLUDE AS SHOWN BELOW:

2 SETS OF SIDE-FEED OR END-FEED APPLICATOR (01S/E)

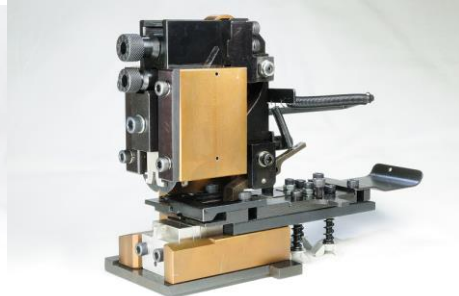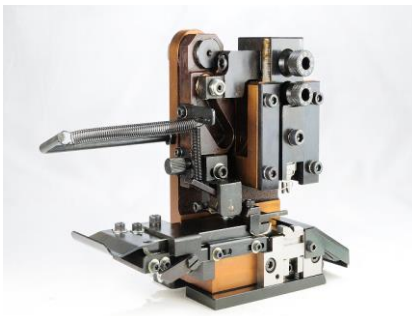

**PAPER WINDER x 2 UNITS
FOR TERMINAL REEL**



**WIRE STRAIGHTENER CUM SENDER M/C
YHPC-SD-F**

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P:+65-96196415 | E-MAIL:pclee@singnet.com.sg

WEBSITE:www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |