


YHPCConnect

2 BLADES ROTARY STRIPPING M/C YHPC-2BRSOD7SL48



Insulation O.D. – Ø 0.5 ~ 7.5 mm
Strip Length – 0.1 ~ 48 mm

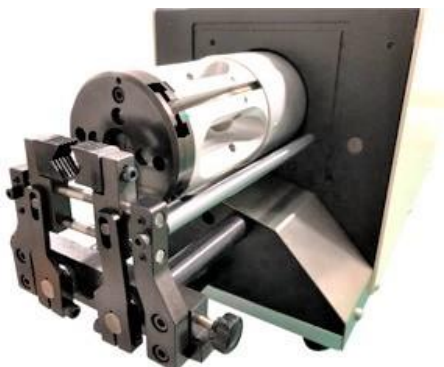

Features:

- 1) Robust and Compact design with safety cover.
- 2) Incorporate precise rotary head with powerful clamp jaw and centralize strip blades that contribute to the precision stripping result. Driven by servo motor and high precision ball screw drive.
- 3) Design mainly for co-axial cable which can strip 9 layers and can store maximum 90 process programs.

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P: +65-96196415 | E-MAIL: pclee@singnet.com.sg

WEBSITE: www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |

2 BLADES ROTARY STRIPPING M/C

YHPC-2BRSOD7SL48

TECHNICAL DATA

Model	YHPC-2BRSOD7SL48
Function	Rotary Strip Outer Jacket for Multi-Core and Co-Axial Cable. Maximum Strip – 9 Layers
Capacity	700 Pcs./ Hr.
Wire Insulation O.D.	Ø 0.5 ~ 7.5 mm
Strip Length	0.1 ~ 48 mm
Stripping Layers	Max. 9 layers
Rotary Blades Qty	2 Pieces
Drive Method	Servo motor and Ball Screw Drive
Display Screen	English / Chinese touch screen
Storage File	100 programs
Switch Mode	Manual Switch/ Contact Switch / Foot Switch
Power Supply	Single Phase 220V +/-10%, 50 Hz, 380W Need to inform if require 110V
Air Supply	4.1 ~ 7.0 kgf/cm ² (0.4 ~ 0.7 MPa) must be clean dry air.
Dimension	53 (L) x 19 (W) x 30 (H) cm
Net Weight	19 Kgs
H.S. Code	8479899990
Country Of Origin	China