


Cable Cut & Strip Machine Synchronize With Cable Winder Machine, 1 Tray

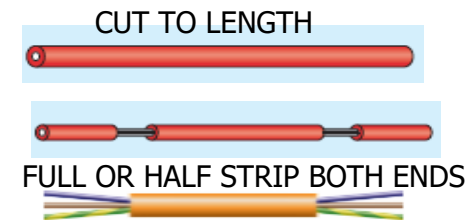

APPLICABLE WIRE SIZE:-
Single Core or Multi-Cores
Single Core - AWG 10 ~ 03 (06 ~ 30.0 mm²)
Wire / Cable O.D. Max. – Ø18.0 mm

YHPC CONNECT | BLK. 478C, YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P: +65-91293768 | E-MAIL: pclee@singnet.com.sg / yhpc99@gmail.com

WEBSITE: www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |

Cable Cut & Strip Machine



Name / Model	YHPC-603
AC Voltage	Standard 220V Can select 110V
Frequency	50/60Hz
Voltage Range	Min. 205V ~ Max. 240V
Current	2.5A
Power Capacity	1Kw
Air Pressure Require	0.5 ~ 0.7 Mps
Air Pressure Flow	Max. 90L / minute
Environment Temperature	-10 ~ 45°C
Storage & Transportation Temperature	-20 ~ 65°C
Max. Ø of Cable Guide Pipe	Ø16 mm
Cable Size	1 ~ 30 mm ²
Front Strip Full	120 mm
Rear Strip Full	80 mm
Front Half Strip	Max. 1000mm
Rear Half Strip	Max. 350mm

Name / Model	YHPC-603
Pressure Wheel Adjustment Method	Step, Digital Adjustment
Cable Feed Method	Belt Type
Cable Feed Drive Motor	Stepper Motor, Option-Servo Motor
Knife Moving Drive	Pneumatic Cylinder
Blades Holder Feed Type	Servo + Precision Screw
Blades Holder Accuracy	0.01 mm
Cooling Method	Air Cooling
Electro Magnetic Valve	Festo
Electric Control	Delta
Touch Screen	Kinco GL070
Machine Dimension	795*490*500 mm
Net Weight	92 / 100 Kgs
Packing Dimension	845*540*625 mm
Gross Weight	115 Kgs

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P:+65-91293768 | E-MAIL: pcleee@singnet.com.sg / yhpc99@gmail.com

WEBSITE: www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |



Cable Winder Machine, 1 Tray :-

Name / Model	YHPC-D381	YHPC-D681	YHPC-D1001
Display Method	Touch Screen	Touch Screen	Touch Screen
Function	Cable Winding	Cable Winding	Cable Winding
Wire Type	Multi-Cores Cable	Multi-Cores Cable	Multi-Cores Cable
Control Method	Main Follow Control	Main Follow Control	Main Follow Control
Winding Tray Ø	Ø 380 mm	Ø 680 mm	Ø 1000 mm
Winding Tray Ø Range	Ø 200 ~ 360 mm	Ø 200 ~ 660 mm	Ø 200 ~ 960 mm
Winding Speed	1.5 M / sec.	2.5 M / sec.	2.5 M / sec.
Winding Tray Withstand Weight	10 Kgs	15 Kgs	25 Kgs
Drive Mode	Servo Motor	Servo Motor	Servo Motor
Receive Tray Qty.	1 Tray	1 Tray	1 Tray
Way of Working	Single Cycle	Single Cycle	Single Cycle
Winding Complete Detection	No	No	No
Safety	Pneumatic Safety Door	Pneumatic Safety Door	Pneumatic Safety Door
Dimension (mm)	570*570*1000	746 * 46 * 1000	1061 * 1061 * 1015

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P: +65-91293768 | E-MAIL: pcleee@singnet.com.sg / yhpc99@gmail.com

WEBSITE: www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |