

AUTO ONE END CRIMP MACHINE YHPC-CAW-SD-600G

AWG 18 ~ 28
(0.75 ~ 0.08 mm²)



Applicable to End-Feed,
Flag Wrap terminal



≥ 20.0 mm (with twisting)
≥ 08.0 mm (without twisting)



Features

- 1) Productivity achievement for 100~200 mm – 3500 pcs / hr (With Twisting)
300 mm – 3,800 ~ 4,000 pcs / hr. (Without Twisting)
- 2) All Setting done thru touch screen saving time for set up.
- 3) Applicable for End-Feed , Flag Wrap terminal crimping.
- 3) Quick set-up for OTP/Jam applicator.

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P:+65-96196415 | E-MAIL:pclee@singnet.com.sg

WEBSITE:www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |



AUTO ONE END CRIMP MACHINE YHPC-CAW-SD-600G

Technical Data

Model	YHPC-CAW-SD-600G
Function	Cut , Strip & Crimp Single End with the other end able to do twisting..
Wire Size	Awg 18 ~ 28 (0.75 ~ 0.8 mm ²), Insulation O.D. maximum Ø2.6
Applicable Wire	AV, AVS, AVSS, CAVUS, KVKIV, UL
Stripping Length	Front & Rear Strip – 12.0 mm If need more than 12.0 mm will be consider customize.
Twisting Length	3 ~ 12 mm
Cut Length	≥ 20.0 mm (with twisting) ~ 9999 mm ≥ 08.0 mm (without twisting) ~ 9999 mm
Cut Length Accuracy	Cutting Length below 100mm: 0.5mm+(Setting Cut Length x 0.002) Cutting Length above 100mm: 1.0mm+(Setting Cut Length x 0.002)
Crimp Machine	2.0 tons , Ultra Quiet Frequency Conversion motor x 1 unit
Stroke Length	30 mm
Applicator	Side-Feed and End-Feed type, 01S or 01E. / OTP / JAM Also applicable to End-Feed , Flag Wrap terminal
Production Capacity	3,500 Pcs / Hr with twisting for 100 ~ 200 mm length 3,800 ~ 4,000 .Pcs / Hr. without twisting for 300 mm length
Detector	Pressure down, Crimp error, Wire load
Air Pressure	4 ~ 6 kgf /cm ² , Use Dry Air
Power Source	AC 220V(within±10%) 50 Hz Single Phase, *True Earth require. Pls. specify if you are using AC 110V
Optional	Crimp Force Monitor- 1 Channel , SOLTEC brand
Dimension/Mass	600 * 700 * 1500 mm / 280 kgs
Packing Dimension	
Packing Include	Wire Straightener cum Sender, SD-F, 01S or 01E Applicator x 1, Paper Winder x 1
Country Of Origin	China Factory, Taiwan Managemet

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |



H/P:+65-96196415 | E-MAIL:pclee@singnet.com.sg

WEBSITE:www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |



PACKING INCLUDE AS SHOWN BELOW:

1 SET OF SIDE-FEED OR END-FEED APPLICATOR (01S/E)

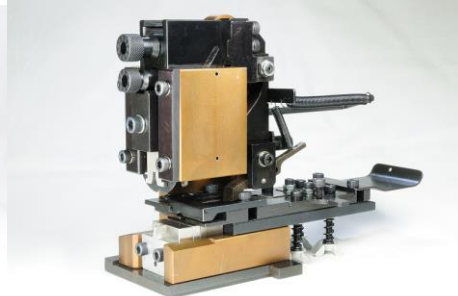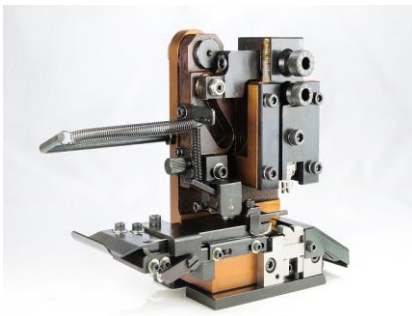

**PAPER WINDER x 1 UNITS
FOR TERMINAL REEL**



**WIRE STRAIGHTENER CUM SENDER M/C
YHPC-SD-F**

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P:+65-96196415 | E-MAIL:pclee@singnet.com.sg

WEBSITE:www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |