



YHPCConnect

INSULATED CORD END SLEEVE FERRULE CRIMP M/C

YHPC-ICESFC5~4.0

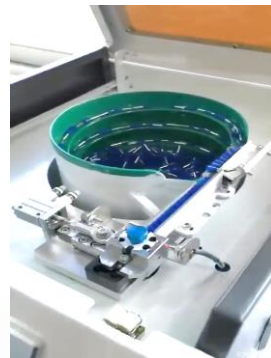

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P: +65-91293768 | E-MAIL: yhpc99@gmail.com

WEBSITE: www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |

INSULATED CORD END SLEEVE FERRULE CRIMP M/C

YHPC-ICESFC5~4.0

Technical Data

Model	YHPC-ICESFC-05~4.0
Function	Strip & Crimp Insulated Cord End Sleeve Ferrule Crimp Profile – Quadrilateral shape
Conductor Cross Section	0.5, 0.75, 1.0, 1.5, 2.5, 4.0 mm square
Production Capacity	2.5 sec. / cycle
Display	Touch screen in English or Chinese
Power Supply	Single Phase AC 220V +/-10%, 50Hz If require AC 110V need to inform us.
Air Supply	Dry & Clean Air, 0.6 ~ 0.8 MPA or 6 ~ 8 kgf/cm ²
Operating Temperature	10 ~ 25 ° C
Working Humidity	30 ~ 80% RH
Dimension (L x W x H)	35 x 45 x 40 cm
Net Weight	40 kgs
Country Of Origin	China

YHPC CONNECT | BLK. 478C ,YISHUN STREET 44, #09-161 SINGAPORE 763478 |

H/P:+65-91293768 | E-MAIL: yhpc99@gmail.com

WEBSITE:www.technocore.com.sg | CONTACT PERSON – LEE PENG CHAI |